

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/75010 A1

(51) International Patent Classification⁷: B63B 35/44,
E02B 17/02

(21) International Application Number: PCT/NO00/00198

(22) International Filing Date: 7 June 2000 (07.06.2000)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
19992761 7 June 1999 (07.06.1999) NO

(71) Applicant (for all designated States except US): MPU ENTERPRISE AS [NO/NO]; P.O. Box 17, N-1324 Lysaker (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SCHIA, John [NO/NO]; Strömstangvn. 36, N-1367 Snarøya (NO).

OLSEN, Tor, Ole [NO/NO]; Dicksvei 10, N-1325 Lysaker (NO). HÖYLAND, Kolbjörn [NO/NO]; Fasansvingen 29, N-1349 Rykkinn (NO). HÆREID, Kåre, O. [NO/NO]; Bestumvn. 75a, N-0283 Oslo (NO). HANSEN, Jörn, Bastholm [NO/NO]; Kalkfjellet 45, N-1387 Asker (NO). LANDBÖ, Trond [NO/NO]; Vestlivn. 20B, N-1344 Haslum (NO).


(74) Agent: BRYN & AARFLOT AS; P.O. Box 449 Sentrum, N-0104 Oslo (NO).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: DEVICE FOR POSITIONING AND LIFTING A MARINE STRUCTURE, PARTICULARLY A PLATFORM DECK

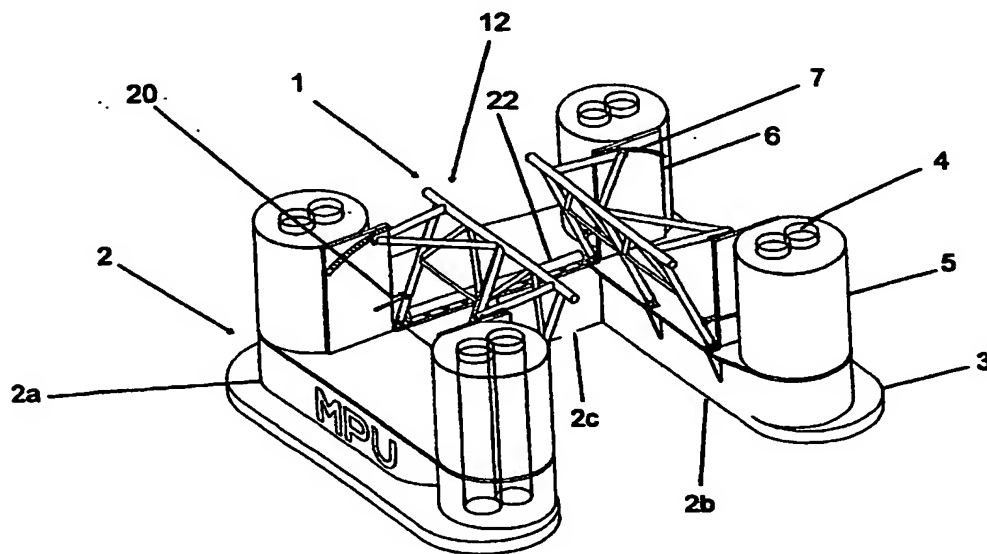

(57) Abstract: A device for positioning and lifting a marine structure, particularly a platform deck, with the use of a U-shaped lifting vessel (1). The device has at least two adjustable lifting frames (12, 12), each able to incline towards the middle of the docking area. Each of the lifting frames (12) consists of an upper horizontal lifting beam (13), preferably situated on a level above the top of the lifting vessel (1). The near-vertical part of the lifting frame (16) is connected to the lifting beam (13) in the upper end and in the lower end hinged (21) to the lifting vessel (1). The near-horizontal part of the lifting frame (18) is in one end connected to the lifting beam (13) and in the other end adjustably connected to the lifting vessel (1).

WO 00/75010 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(15) Information about Correction:

see PCT Gazette No. 44/2001 of 1 November 2001, Section II

Published:

— *with international search report*

(48) Date of publication of this corrected version:

1 November 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.